


## Three-terminal positive voltage regulator

**BL78M05**

### FEATURES

- Output current in excess of 0.5A.
- No external components.
- Internal thermal overload protection.
- Internal short circuit current-limiting.
- Output transistor safe-area compensation.

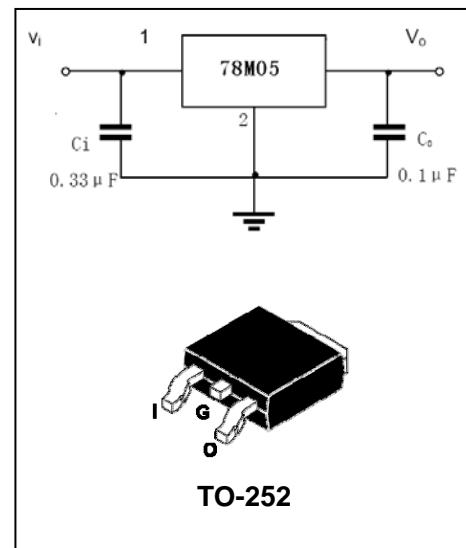

### APPLICATIONS

- Three-terminal positive voltage regulator.

### MAXIMUM RATING

operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V <sub>I</sub>	Input voltage	35	V
P <sub>D</sub>	Power Dissipation	1.25	W
R <sub>θJA</sub>	Thermal Resistance Junction-Air	92	°C/W
T <sub>OPR</sub>	Operating junction temperature	-25 to 125	°C
T <sub>stg</sub>	Storage temperature range	-65 to +150	°C

**Three-terminal positive voltage regulator****BL78M05****ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub>=10V,I<sub>O</sub>=350mA,C<sub>IN</sub>=0.33μF,C<sub>O</sub>=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V <sub>O</sub>	I <sub>O</sub> =350mA,V <sub>IN</sub> =10V 5mA≤I <sub>O</sub> ≤350mA 7V≤V <sub>IN</sub> ≤20V	4.8 4.75 4.75	5 5 5	5.2 5.25 5.25	V
Load regulation(Note1)	△Reg <sub>load</sub>	5mA≤I <sub>O</sub> ≤500mA 5mA≤I <sub>O</sub> ≤200mA			100 50	mV
Line regulation(Note1)	△Reg <sub>line</sub>	7V≤V <sub>IN</sub> ≤25V,I <sub>O</sub> =200mA 8V≤V <sub>IN</sub> ≤20V, I <sub>O</sub> =200mA			100 50	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =10V,I <sub>O</sub> =350mA		4.0	6.0	mA
Quiescent Current Change	△I <sub>Q</sub>	5mA≤I <sub>O</sub> ≤350mA 8V≤V <sub>IN</sub> ≤25V,I <sub>O</sub> =200mA			0.5 0.8	mA
Output Voltage Drift	△V / △T	I <sub>O</sub> =5mA, T <sub>J</sub> =0 to +125°C		-0.5		mV/°C
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100KHz		40		μV/V <sub>O</sub>
Ripple Rejection	RR	f=120Hz,I <sub>O</sub> =300mA, V <sub>I</sub> =8V to 18V	62			dB
Dropout Voltage	V <sub>D</sub>	T <sub>A</sub> =+25°C,I <sub>O</sub> =500mA		2.0		V
Short Circuit Current	I <sub>SC</sub>	V <sub>I</sub> =35V,T <sub>J</sub> =25°C		300		mA
Peak Current	I <sub>PK</sub>	T <sub>J</sub> =25°C		700		mA

Note:1.Load and line regulation are specified at constant,junction temperature.Change in V<sub>O</sub> due to Heating effects must be taken into account separately.Pulse testing with low duty is used.


## Three-terminal positive voltage regulator

**BL78M05**


### PACKAGE OUTLINE

Plastic surface mounted package

TO-252

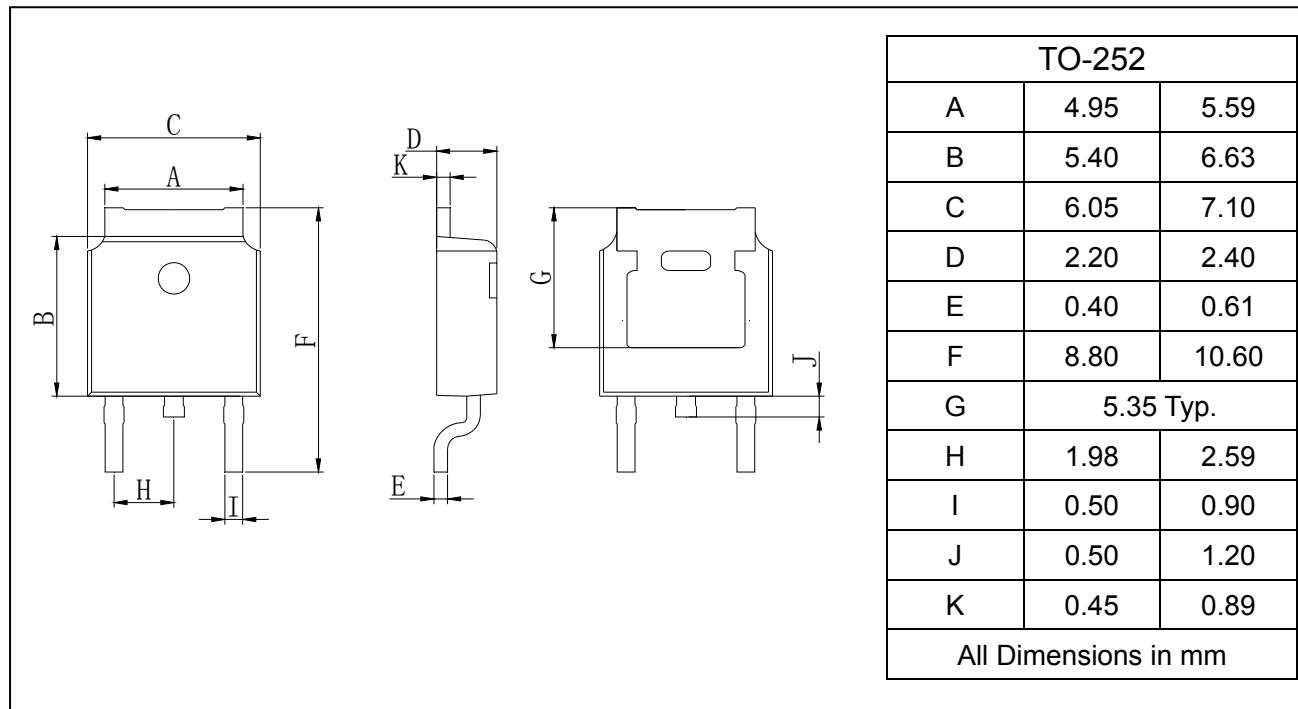

### SOLDERING FOOTPRINT

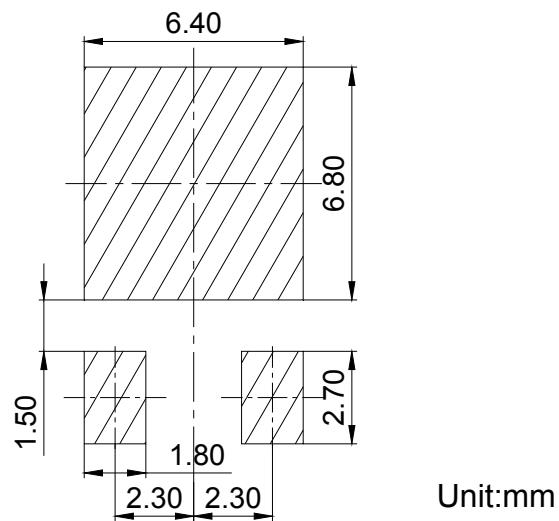

## Three-terminal positive voltage regulator

**BL78M05**

### PACKAGE INFORMATION

Device	Package	Shipping
BL78M05	TO-252	80PCS/Tube
		2500PCS/Tape&Reel