

Silicon Bridge Rectifiers

3SPB30MHM

Features

- Glass passivated junction
- High surge current capability
- Saves space on printed circuit boards
- High temperature soldering guaranteed:
260°C/10 seconds
- RoHS Compliant
- Halogen Free

HF



Mechanical Data

- Case: 3SPB molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Leads solderable per MIL-STD-750,
- Mounting position: Any

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	3SPB30MHM	Units
Peak repetitive reverse voltage	V _{RRM}	1000	V
RMS reverse voltage	V _{RMS}	700	V
DC blocking voltage	V _{DC}	1000	V
Maximum average forward output current	I _{F(AV)}	3.0	A
Peak forward surge current, 8.3ms single half-sine-wave	@T _J = 25°C I _{FSM}	100	A

Thermal Characteristics

Parameter	Symbol	3SPB30MHM	Units
Typical thermal resistance per leg (Note 1)	R _{θJA}	37	°C /W
	R _{θJC}	10.4	
	R _{θJL}	7.5	
Operating junction temperature range	T _J	- 55 ---- + 150	°C
Storage temperature range	T _{STG}	- 55 ---- + 150	°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Silicon Bridge Rectifiers

3SPB30MHM

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage	V _F	I _F =3A Per Diode		-	1.15	V
Maximum Reverse current	I _R	Rated V _R , Per Diode	@T _A =25°C	--	10	μA
			@T _A =125°C	--	100	

Silicon Bridge Rectifiers

3SPB30MHM

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

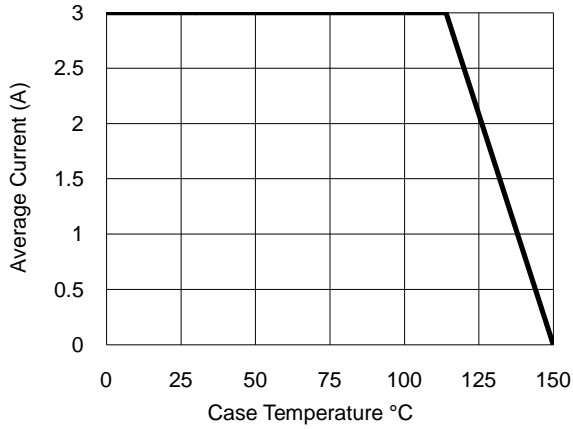


Fig.2- Surge Current Derating Curve

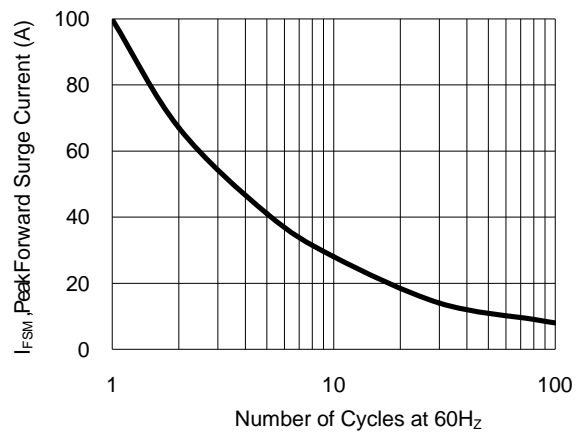


Fig.3- Typical Forward Voltage Characteristic


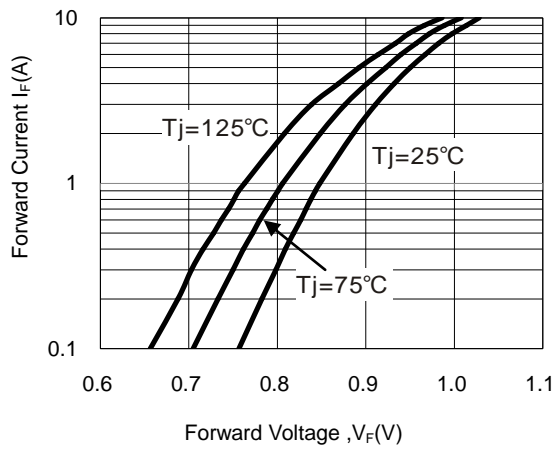



Fig.4- Typical Reverse Characteristic

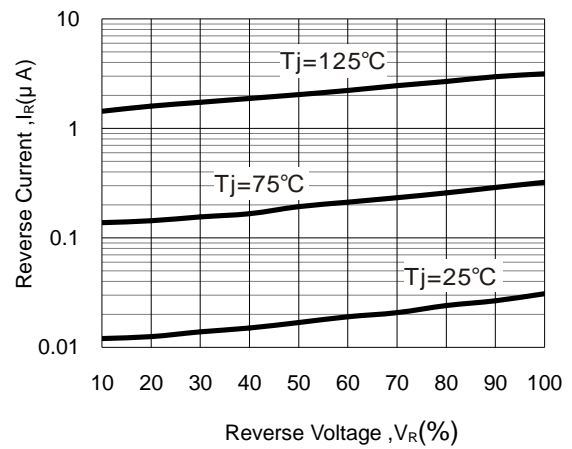


Silicon Bridge Rectifiers

3SPB30MHM

Package Outline Dimensions(unit:mm)

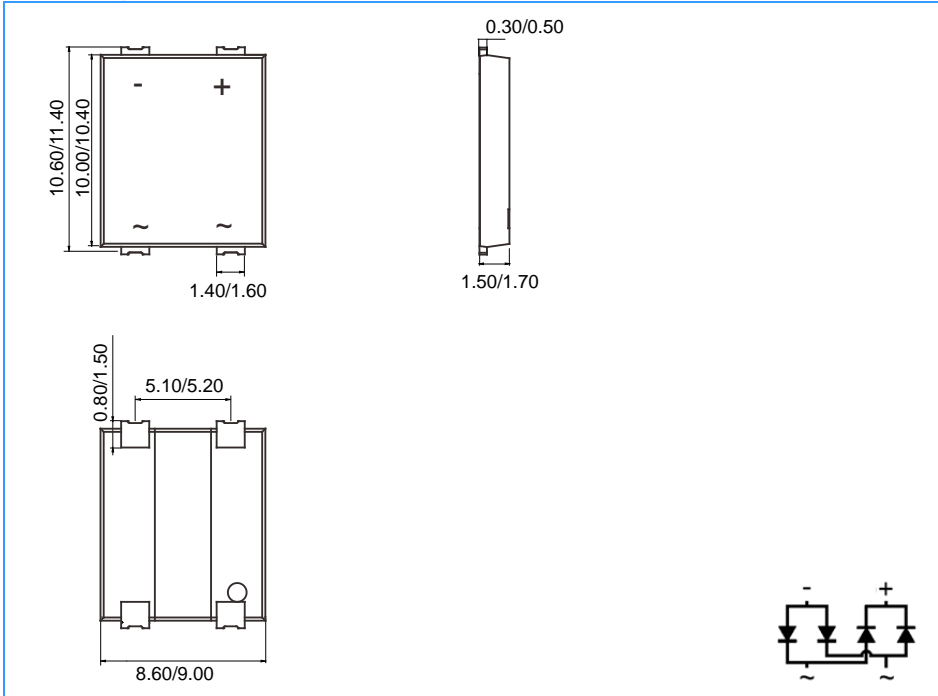

Mounting Pad Layout(unit:mm)

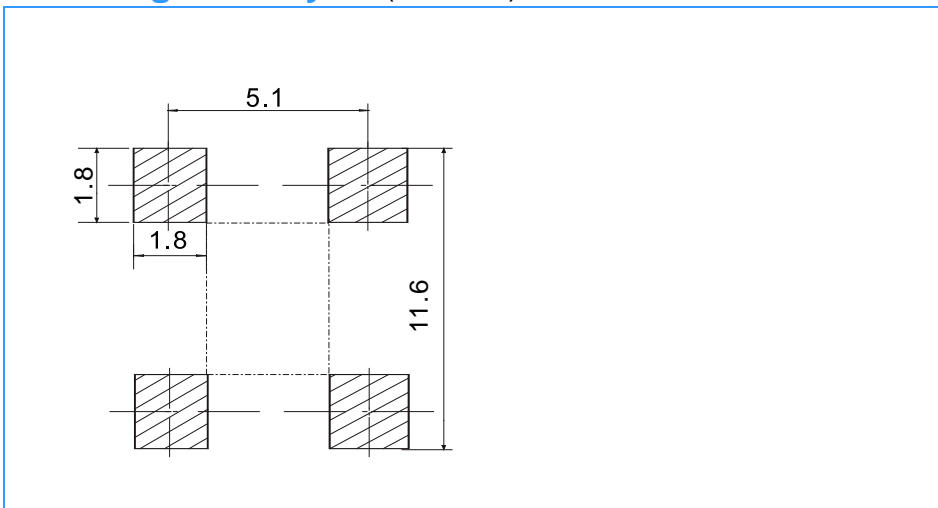

Ordering Information

Part No.	Marking	Package	Shipping
3SPB30MHM	3SPB30M	3SPB	1500/Tape&Reel