

Three-terminal positive voltage regulator


BL78M06

FEATURES

- Output current in excess of 0.5A.
- No external components..
- Internal thermal overload protection.
- Internal short circuit current-limiting.
- Output transistor safe-area compensation.



Lead-free

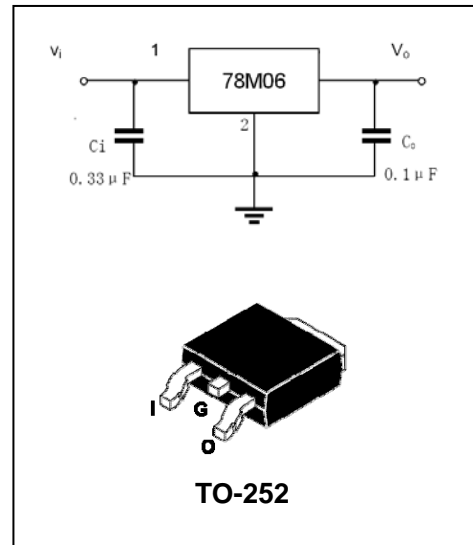

APPLICATIONS

- Three-terminal positive voltage regulator.

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input voltage	35	V
P_D	Power Dissipation	1.25	W
$R_{\theta JA}$	Thermal Resistance Junction-Air	92	$^{\circ}\text{C}/\text{W}$
T_{OPR}	Operating junction temperature	0 to 150	$^{\circ}\text{C}$
T_{stg}	Storage temperature range	-65 to +150	$^{\circ}\text{C}$

Three-terminal positive voltage regulator

BL78M06

ELECTRICAL CHARACTERISTICS

($V_{IN}=11V, I_O=350mA, C_{IN}=0.33\mu F, C_O=0.1\mu f$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	$I_O=350mA, V_{IN}=11V$ $5mA \leq I_O \leq 350mA$ $8V \leq V_{IN} \leq 21V$	5.75 5.7 5.7	6 6 6	6.25 6.3 6.3	V
Load regulation(Note1)	ΔReg_{load}	$5mA \leq I_O \leq 500mA$ $5mA \leq I_O \leq 200mA$			120 60	mV
Line regulation(Note1)	ΔReg_{line}	$8V \leq V_{IN} \leq 25V, I_O=200mA$ $9V \leq V_{IN} \leq 25V, I_O=200mA$			100 50	mV
Quiescent Current	I_Q	$V_{IN}=11V, I_O=350mA$		4.0	6.0	mA
Quiescent Current Change	ΔI_Q	$5mA \leq I_O \leq 350mA$ $9V \leq V_{IN} \leq 25V, I_O=200mA$			0.5 0.8	mA
Output Voltage Drift	$\Delta V / \Delta T$	$I_O=5mA, T_J=0 \text{ to } +125^\circ C$		-0.5		mV/ $^\circ C$
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		45		$\mu V/V_O$
Ripple Rejection	RR	$f=120Hz, I_O=300mA,$ $V_I=11.5V \text{ to } 21.5V$	59			dB
Dropout Voltage	V_D	$T_A=+25^\circ C, I_O=500mA$		2.0		V
Short Circuit Current	I_{SC}	$V_I=35V, T_J=25^\circ C$		300		mA
Peak Current	I_{PK}	$T_J=25^\circ C$		700		mA

Note:1. Load and line regulation are specified at constant, junction temperature. Change in V_O due to Heating effects must be taken into account separately. Pulse testing with low duty is used.


Three-terminal positive voltage regulator

BL78M06


PACKAGE OUTLINE

Plastic surface mounted package

TO-252

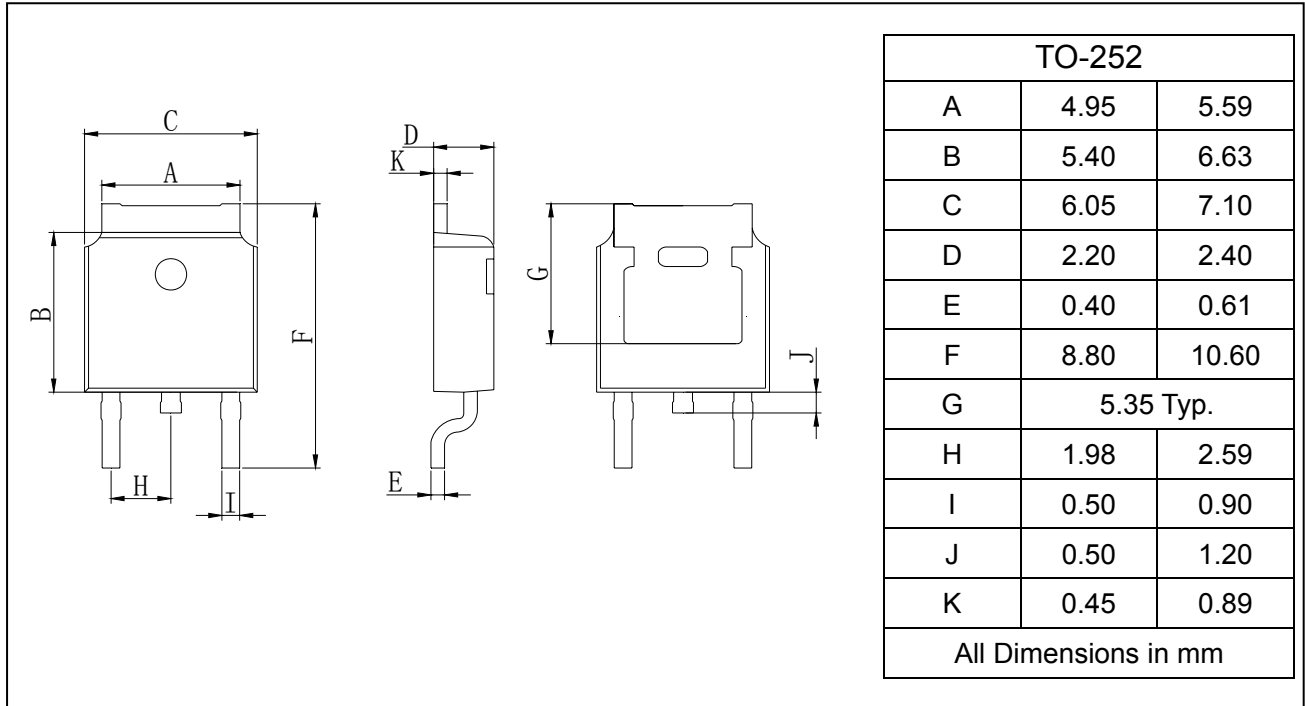

SOLDERING FOOTPRINT

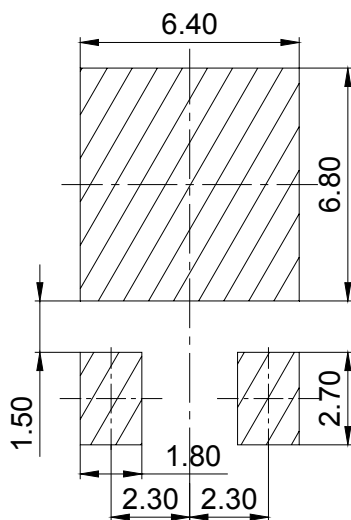

Unit:mm

Three-terminal positive voltage regulator

BL78M06

PACKAGE INFORMATION

Device	Package	Shipping
BL78M06	TO-252	80PCS/Tube
		2500PCS/Tape&Reel